


NON-BLINDING SCALPING SCREEN

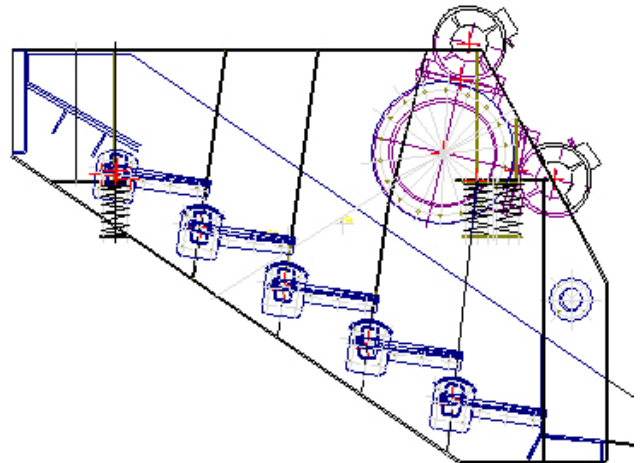

APPLICATION AND OPERATION:

A scalping screen removes fine particles bypassing the crusher and allowing a smaller dimensioned crusher to be used, this will also reduce power consumption.

These screens have no cross beams restricting material flow, the machines have been extremely successful handling river gravel's, reclaimed asphalt, waste slag and industrial refuse.

The screen can accept particle up to 1 tonne mass depending on the grid opening size.

TECHNICAL DATA: (EXAMPLE)

| | |
|------------------|-----------------|
| Type of machine: | SUG 1600 x 2700 |
| Trough width: | 1.600 mm |
| Trough length: | 3.500 mm |
| Product: | ROM coal |
| Grain size: | 0 – 300 mm |
| Capacity: | 800 t/h |
| Grid opening: | 60 mm |

YOUR BENEFIT:

- Grid rods mounted on one end only provide free flow of material.
- Specially forged grid rods keep wear at a minimum.
- Grid deck easy to maintain due to bolted in and easy accessible rod grid sections.
- Rigid design and wear liners give long lifetime.