


FINGER CASCADE SCREEN TopSpin

SWEK 2400 x 6000



SCREEN DECK

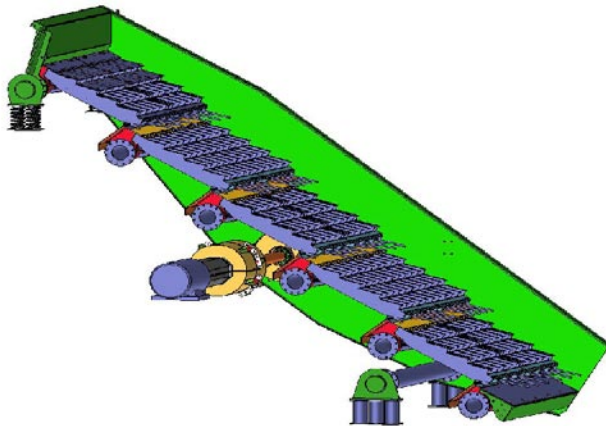

FUNCTION:

For the pre-separation in recycling plants for products which are difficult to screen are increasingly cascade screens applied. The advantage is that they do almost not blockage and at the same time long parts are discharged to the screen oversize.

The finger cascade screen works on basis of a circular vibratory screen with higher than average acceleration values, generated via JOEST shaft drive. Due to the high acceleration values with the conical opening finger screen system in cascade shaped arrangement - there is firstly a breaking up of the material and secondly a screening nearly without any blockage reached.

For best separation results, our finger cascade screens are equipped with a feeding floor for optimal product distribution and with additional revolving steps.

The area of operation is at a screen cut of 30 to 200 mm.

YOUR BENEFIT:

- Classifying of products which are difficult to screen
- Screening nearly blockage free
- Few maintenance time
- High throughput performance
- Optimal product revolving
- Application of JOEST drives

ACCESSORIES:

- Static or resonant cover
- Vibration insulation frame
- Vibrating monitoring system
- Inspection stages

Type	width x length [mm]	Weight [kg]	Power Installed [KW]	Throughput [m³/h]
SWEK 1200	1200 x 4000	2000	7,5	90
SWEK 1400	1400 x 4000	2500	11	110
SWEK 1600	1600 x 5000	3200	15	160
SWEK 2000	2000 x 6000	5000	22	240
SWEK 2400	2400 x 6000	7500	30	290